

Naval Research Laboratory

Washington, DC 20375-5000



AD-A237 791



NRL Memorandum Report 6783

Further Investigations Using the NEUTRAL Code

JOHN M. LES AND ROBERT E. TERRY

*Radiation Hydrodynamics Branch
Plasma Physics Division*

June 26, 1991



This research was sponsored by the Defense Nuclear Agency, under Subtask Code and Title:
RL RB/Advanced Technology Development, Work Unit Code 00079, MIPR No. 89-565.

91-04315



Approved for public release; distribution unlimited

REPORT DOCUMENTATION PAGE			Form Approved OMB No. 0704-0188	
Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503.				
1. AGENCY USE ONLY (Leave blank)	2. REPORT DATE 1991 June 26	3. REPORT TYPE AND DATES COVERED Interim		
4. TITLE AND SUBTITLE Further Investigations Using the NEUTRAL Code		5. FUNDING NUMBERS 62715H DN880-191		
6. AUTHOR(S) John M. Les and Robert E. Terry				
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Naval Research Laboratory Washington, DC 20375-5000		8. PERFORMING ORGANIZATION REPORT NUMBER NRL Memorandum Report 6763		
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) Defense Nuclear Agency Washington, DC 20301		10. SPONSORING/MONITORING AGENCY REPORT NUMBER		
11. SUPPLEMENTARY NOTES This research was sponsored by the Defense Nuclear Agency, under Subtask Code and Title: RL RB/Advanced Technology Development, Work Unit Code 00079, MIPR No. 89-565.				
12a. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution unlimited.		12b. DISTRIBUTION CODE		
13. ABSTRACT (Maximum 200 words) Some applications of the NEUTRAL code, as discussed in a previous NRL Memorandum report, are considered. NEUTRAL was run with an energy dependent cross section and the results were compared to the analytical expressions of Prono et al. Good agreement exists between these two approaches. A parameter study was done to see how the neutral energy varied with the background gas width. It was determined if one knew the cross sections exactly, then from measurements of the average neutral energy, one could infer an average gas width. NEUTRAL was also modified to model a linearly time rising electric field, which is a closer representation to the actual operation of a reflex switch. It was found that the average neutral energy seems to increase linearly in time as well. A comparison is also made to a simple quasistatic model and only limited agreement is shown to occur. Discussion on the need to include a time rising current density is presented and it is mentioned that future work is being focused on this program.				
14. SUBJECT TERMS		15. NUMBER OF PAGES 25		
		16. PRICE CODE		
17. SECURITY CLASSIFICATION OF REPORT UNCLASSIFIED	18. SECURITY CLASSIFICATION OF THIS PAGE UNCLASSIFIED	19. SECURITY CLASSIFICATION OF ABSTRACT UNCLASSIFIED	20. LIMITATION OF ABSTRACT SAR	

CONTENTS

INTRODUCTION	1
COMPARISON OF RESULTS	1
A PARAMETER STUDY	3
TIME RISING ELECTRIC FIELD	4
TIME RISING CURRENT DENSITY	6
SUMMARY AND CONCLUSIONS	8
FUTURE WORK	8
ACKNOWLEDGEMENTS	8
REFERENCES	9
DISTRIBUTION LIST	17

Accession For	
NTIS GRA&I	<input checked="checked" type="checkbox"/>
DTIC TAB	<input type="checkbox"/>
Unannounced	<input type="checkbox"/>
Justification	
By	
Distribution/	
Availability Codes	
Dist	Special
A-1	

FURTHER INVESTIGATIONS USING THE NEUTRAL CODE

Introduction

NEUTRAL is a one dimensional code that was written to simulate ions, accelerated by an electric field, charge-exchanging in a background medium. This charge-exchange mechanism has been proposed by Prono et al.¹ to explain the premature shorting of the anode-cathode gap in ion diodes, and is also thought to occur in the reflex switch²⁻⁴. Further details can be found in reference (5), which we will denote here as memol. This report will essentially be a continuation of memol, but we will consider problems that are closer to the actual physical situation being modeled. We will also discuss and present a parameter study that was done with the NEUTRAL code. Parameter studies are very important in the charge-exchange problem, as it relates to the reflex switch, since no measurements of relevant physical quantities, such as density or electric fields, exist at the present time.

Comparison of Results

To complete the final testing phase of the NEUTRAL code, see memol for more details, we used the energy dependent cross section $\sigma(w)$ assumed by Prono et al.¹. The form of this cross section was

$$\sigma(w) = \frac{\sigma_0}{\left(1 + \left(\frac{w}{w_0}\right)^2\right)} \quad (1)$$

with $\sigma_0 = 2.0 \times 10^{-15} \text{ cm}^2$ and $w_0 = 10 \text{ Kev}$. Keeping the rest of the input variables the same as in the standard case, see again memol for specific values, and using the cross section given in equation (1), NEUTRAL produced figures 1 - 3. As in memol, the dashed curves in figures 2 and 3 are the analytical results for direct comparison. However, unlike memol, these theoretical solutions are those found by Prono et al.¹ and are given here for convenience

$$g(W, X) = \alpha \frac{mF}{w_o C} H(X - \alpha W) e^{-B\alpha W} \left[1 - \frac{e^{-CB(X - \alpha W)}}{B} \right] \quad (2)$$

$$G_w(X) = \frac{w_o F}{\alpha B} \left[\frac{1}{CB} + e^{-BX} - \frac{e^{-CBX}}{C} \right] \quad (3)$$

$$G(X) = \frac{F}{CB} (1 - e^{-CBX}) \quad (4)$$

where

$$X = x/\lambda$$

$$W = w/w_o$$

$$\alpha = w_o/(qE\lambda)$$

$$C = e^{-\alpha\pi/2}$$

$$B = (1 - C)^{-1}$$

Note that these above equations are the corrected versions of the Prono et. al. solutions, given by Creedon⁶. As in memol, g is the neutral distribution function and G_w is the neutral energy flux which we will not use here. And using the notation of Prono et al.¹, G is the net neutral flux. From figure 1 we determined that the ion flux $F = 4.3 \times 10^{15} \text{ cm}^{-2} \text{ sec}^{-1}$. Figure 2 shows the neutral flux profile as a function of x . The dashed curve is just the plot of equation (4) with the ion flux F mentioned previously, and the solid curve represents the simulation results. In figure 3 we have the neutral distribution at the vacuum plasma interface (see memol). Once again the dashed curve represents the analytical result, and this is given by equation (2) with $x = x_{\text{max}}$. We see from these figures that we have very good agreement between theory and simulation. This also shows that the assumptions made by Prono et. al.¹ in their derivations, were quite reasonable.

At this point one may be wondering about the magnitude of the ion flux F , and whether or not this has any physical basis. All we can say is that this flux was arbitrarily chosen since there has been no measurements, at least to our knowledge, of the neutral flux. For the test cases run so far it is not necessary that the values used as input reflect exactly the real charge-exchange problem, since we are just looking for consistency in our output. However, the use of reasonable estimates of physical quantities is certainly desirable. The same holds true for densities and electric fields, they should not be taken too seriously since we are just scoping the code out.

A Parameter Study

Next we used another version of the NEUTRAL code that incorporates a spatially varying background neutral gas given by

$$n(x) = \frac{n_0}{\left(1 + \left(\frac{x}{x_0} \right)^2 \right)} \quad (5)$$

For our purpose $n_0 = 1.0 \times 10^{16} \text{ cm}^{-3}$, which is just the value used in the standard run case, see mem01 for more details. The quantity x_0 is a measure of the width of the density profile and will be varied in our parameter study. This alternate version of the NEUTRAL code also contains a charge-exchange cross section that is derived from experimental data⁷. The form of this cross section is similar to that given by equation (1). A simple parameter study was done in which we varied x_0 and observed the average neutral energy at the point $x = x_{\text{max}} = 0.1 \text{ cm}$, which is just the width of the charge-exchange region in the reference standard case (see mem01). The result of this study is shown in figure 4. Computer runs were done for $x_0 = 0.005 \text{ cm}$, 0.05 cm , 0.01 cm , 0.1 cm , 0.5 cm , and 1.00 cm . As one can see the neutral energy increases quickly until $x_0 = 0.05 \text{ cm}$, after

which the energy only rises slowly. We expect this type of behavior because when $x_0 \gg w_0/qE$, where q is the ion charge, E is the magnitude of the electric field, and w_0 is the "cut off energy" of the charge-exchange cross section (see equation (1)), spatial effects are unimportant. It is only when $x_0 \sim w_0/qE$ or less that spatial effects become appreciable. For $w_0 = 10$ Kev, $q = 4.8 \times 10^{-10}$ esu and $E = 1$ MV/cm, we find that $x_0 \sim 0.01$ cm. Thus one can see from this example that if one knew the charge-exchange cross section with reasonable accuracy, and the electric field inside the charge-exchange region, then by measuring the average neutral energy one could estimate the thickness of the background neutral gas or anode plasma (see memol).

Time Rising Electric Field

The NEUTRAL code has also been modified to simulate a linearly rising electric field in time, in the charge-exchange region. The time dependent electric field $E(t)$ is assumed to have the form

$$E(t) = \left(\frac{dE}{dt} \right) t \quad (6)$$

and t is the time in seconds. The quantity dE/dt is a constant and is just the slope of the time varying electric field. This modification to the NEUTRAL code is important since the electric field inside the anode plasma of the reflex switch is not static, as assumed in memol. Thus we can estimate the average energy of a neutral as it enters the vacuum gap (see memol again for more details) as a function of time. At this point we would like to mention that a time rising electric field is only one part of the entire physical picture and this will be discussed later on in this report. The NEUTRAL code was run with the electric field, given by equation (6), with

$$\left(\frac{dE}{dt} \right) = 7.335681 \times 10^{11} \frac{\text{statvolt}}{\text{cm sec}} \quad (7)$$

and one half this value, namely

$$\left(\frac{dE}{dt} \right) = 3.667841 \times 10^{11} \frac{\text{statvolt}}{\text{cm sec}} \quad (8)$$

The first value of dE/dt was chosen such that at the end of the simulation the electric field had the final value of 3333.3333 statvolt/cm, which is just the electric field used in the reference run of mem01. Also the background neutral gas and the charge-exchange cross section were assumed to be constants in these simulations, with the same values as used in the formerly mentioned reference run. This makes comparison with a simple analytical model possible. We note that this time varying field version of NEUTRAL also uses an improved particle pusher algorithm. Figure 5 is the simulation using the value of dE/dt given by equation (7). The code results are given by the circles and the dashed straight line is an approximate best line fit, extrapolated to zero energy, at time $t = 0.$, to this data. The solid line, with the dagger point markings, is the plot of the equation

$$\langle E_n \rangle(t) = (qE(t)\lambda) \left[\left(\frac{\lambda}{x_{\max}} \right) \left(e^{-(x_{\max}/\lambda)} - 1 \right) + 1 \right] \quad (9)$$

where $\langle E_n \rangle(t)$ is the average neutral energy as a function of time at the vacuum gas interface, or $x = x_{\max}$. $E(t)$ is of course the time dependent electric field given by equation (6). Note that equation (9) is just (equation (15) of mem01, but with the static electric field replaced by $E(t)$. This substitution, though somewhat questionable, should be valid if the electric field rises so slowly over time that the system goes through a succession of equilibrium states, i.e., the problem is quasistatic. As

(one can see from figures 5 and 6, this does not seem to be a too bad of an assumption. Figure 6 is the same situation except that dE/dt is now given by equation (8). This case was run to see if a smaller dE/dt would cause the simulation results to approach the expression given by equation (9). As one can see the code predicts nearly the same energy at $t = 2.27$ ns as equation (9), but for later times the accuracy is about the same as in figure 5, roughly ± 3 Kev. To determine if the difference in slopes as seen in figures 5 and 6 is caused by code inaccuracies, we plotted the average neutral energy as a function of electric field, as given in figure 7. The code generated results are given by the circles, and as in figures 5 and 6, the dashed line is an eyeballed best line fit, extrapolated to zero. The solid curve is the analytical result, at $x = x_{\max}$, given by equation (15) in mem01, see also equation (9). We also would like to point out, before we continue, that the neutral energies from the simulation were found by running the static electric field case for different field strengths, as was done in mem01. Referring again to figure 7 we see that, for a fixed time step, the energies differ by about 4 Kev at $E = 3.333 \times 10^3$ statvolt/cm, which is 1 MV/cm. These differences in energy may be due to the time step used, which is certainly the case when $E = 6.666 \times 10^3$ statvolt/cm, or the problem may be due to the particle pusher in the NEUTRAL code. Anyway we can be reasonably confident that the difference in slopes that are found in both figures 5 and 6 can be attributed to the code numerics and not some physical process.

Time Rising Current Density

As was mentioned earlier, the inclusion of a time varying electric field, though very informative, is only half of the full time dependent problem. Usually an electric field in a plasma is accompanied by a current, this can be seen from the simple Ohm's Law, given by (in c.g.s. units)

$$\vec{J} = \sigma \vec{E} \quad (10)$$

where J is the current density, E is the applied electric field, σ is the (scalar) conductivity, and the arrows denote vector quantities. We see from this simple argument that a linearly rising electric field in time would result in a proportionally rising current. A similar reverse argument, again using (10) would imply a time varying current density is related to a time evolving electric field, given by $\vec{E} = \eta \vec{J}$, where η is called the resistivity and $\eta = 1/\sigma$. From the various measurements that have been done on the reflex switch one certainly observes a time rising current, see references 1 - 4. Now assuming for the moment a uniform current density J , the current I is related to J by $J = I/A$, where A is some cross sectional area. So we conclude that the full time dependent problem must include a time varying current density in order to be more realistic. From a computational viewpoint, if we input a known linearly rising current density and electric field, this automatically determines the resistivity or conductivity by equation (10). This could be very helpful in trying to theoretically determine the value of K in the empirical formula for anomalous gap closure in the reflex switch, as given by Creedon et al.^{3,6} This formula has the form

$$\dot{J} \frac{1}{2} t_s^{\frac{3}{2}} = K D_{AK} \quad (11)$$

with

$$\dot{J} = \frac{dJ}{dt} = \text{a constant}$$

where \dot{J} is the time rate of change of the current density and t_s is the primary gap shorting time, with D_{AK} being the primary gap spacing. See memol for a diagram of the reflex switch. At this point in time preliminary work has been done to model the effect of a time rising current density and will be the subject of future reports.

Summary and Conclusions

We have used the NEUTRAL code to simulate the charge-exchange neutral problem as discussed in Prono et. al.¹. There was good agreement between the two results. A parameter study was also run in which we varied the width of the background gas region and found the corresponding average neutral energy. We concluded that such parameter study would be beneficial in determining the width of the anode plasma region. We have also modified the NEUTRAL code to handle a linearly time rising electric field. We compared these results to an analytic expression which was derived by replacing the static electric field with the time varying one. A comparison of the code and the analytical expression showed limited agreement. It does seem however that, from the code results, a linearly rising electric field causes a similar increase in the average neutral energy. It was also noticed that by varying the electric field in the static case, NEUTRAL predicted lower than predicted average neutral energies. This may be caused by not choosing the correct time step or may even be the fault of the particle pusher, this should be investigated further.

Future Work

We are beginning to work on the problem of a time rising current density, since such a problem is a more accurate representation of the operation of a reflex switch. Such a simulation will provide useful input to future models describing the shorting of the vacuum gap.


Acknowledgements

One of us, J.M.L., would like to thank Jim Geary for his encouragement and suggestions during this project.

This work was sponsored by the Defense Nuclear Agency.


REFERENCES

1. D.S. Prono, H. Ishizuka, E.P. Lee, B.W. Stallard, and W.C. Turner, J. Appl. Phys. 52, 3004 (1981).
2. J.M. Creedon, L.J. Demeter, B. Ecker, C. Eichenberger, S. Glidden, H. Helava, and G.A. Proulx, J. Appl. Phys. 57, 1582 (1985).
3. J.S. Levine, J.M. Creedon, M. Krishnan, K.D. Pearce, and P.S. Sincerny, 7th International Conference on High Power Particle Beams, Karlsruhe, July 4-8 (1988).
4. L.J. Demeter, in **Opening Switches**, ed. by, A. Guenther, M. Kristiansen, and T. Martin, (Plenum Press, N.Y., 1987).
5. N.R.L. Memorandum Report (to be published).
6. J.M. Creedon, Private Communication.
7. R.A. Mapleton, **Theory of Charge Exchange**, (Wiley, N.Y., 1972), pgs. 210, 214.

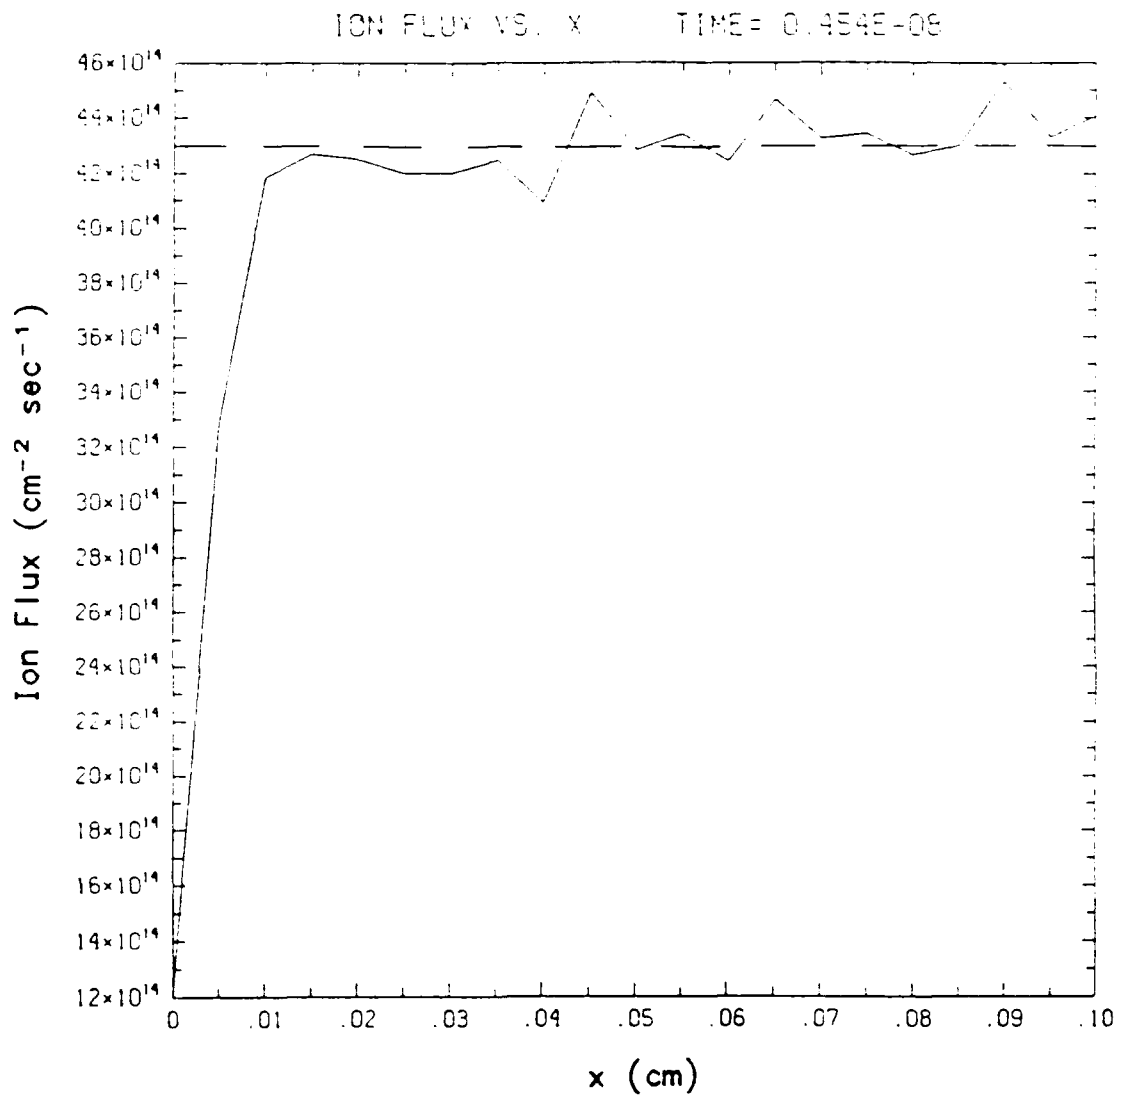


Ion Flux as a Function of x

Figure 1

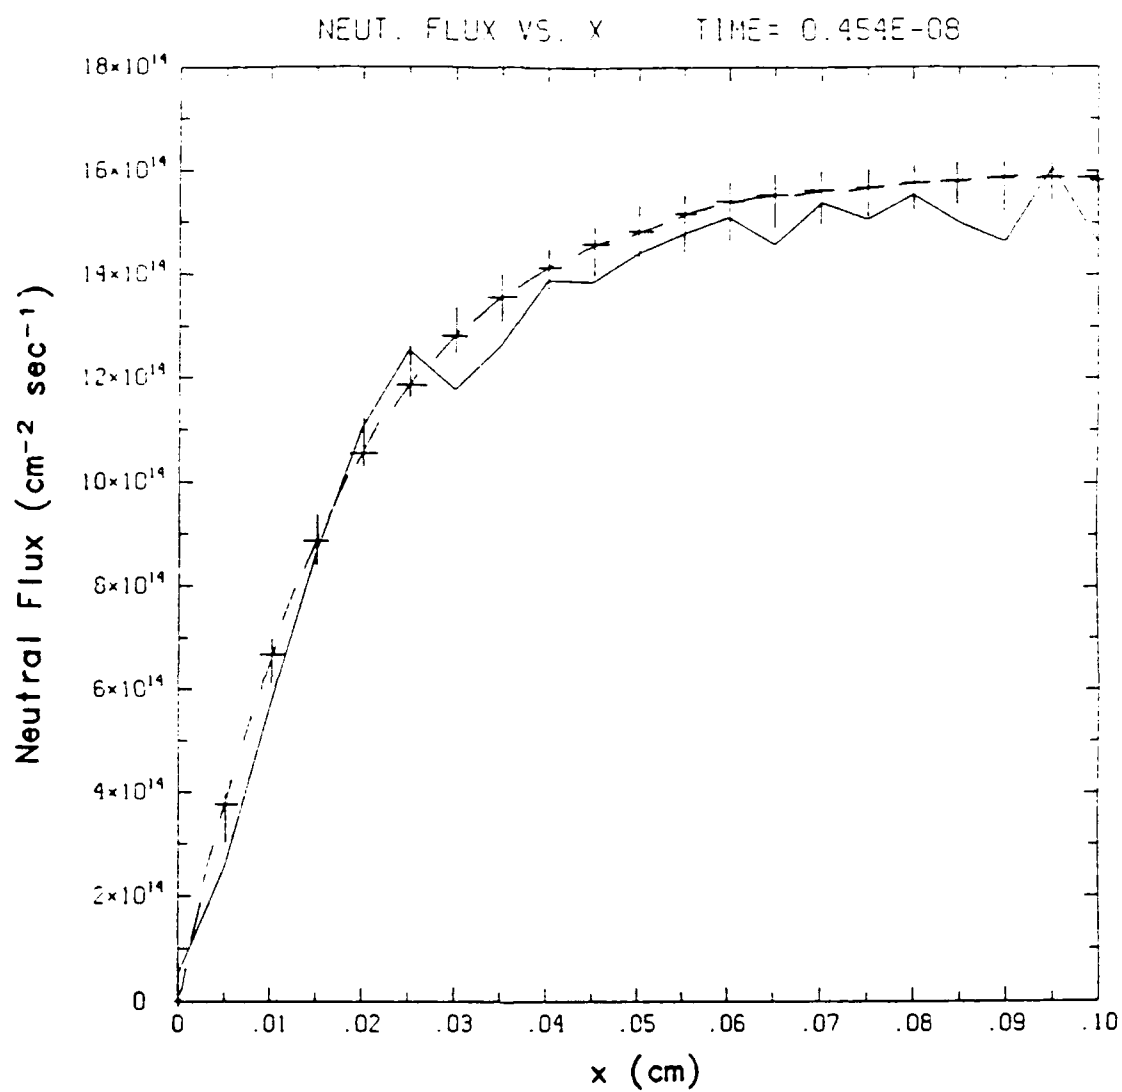


Neutral Flux as a Function of x

Figure 2

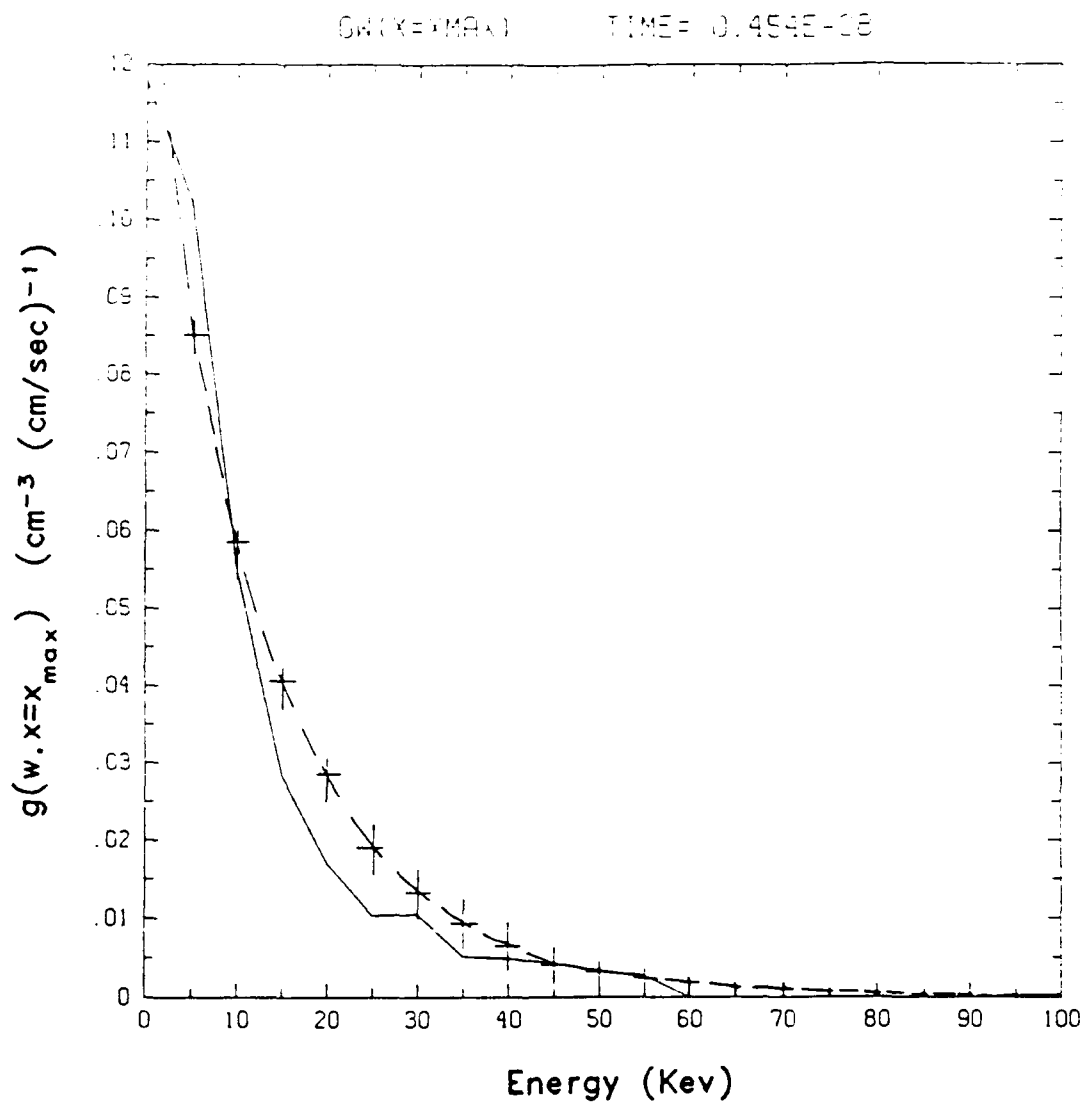


Neutral Distribution at the Vacuum Interface
as a Function of Energy

Figure 3

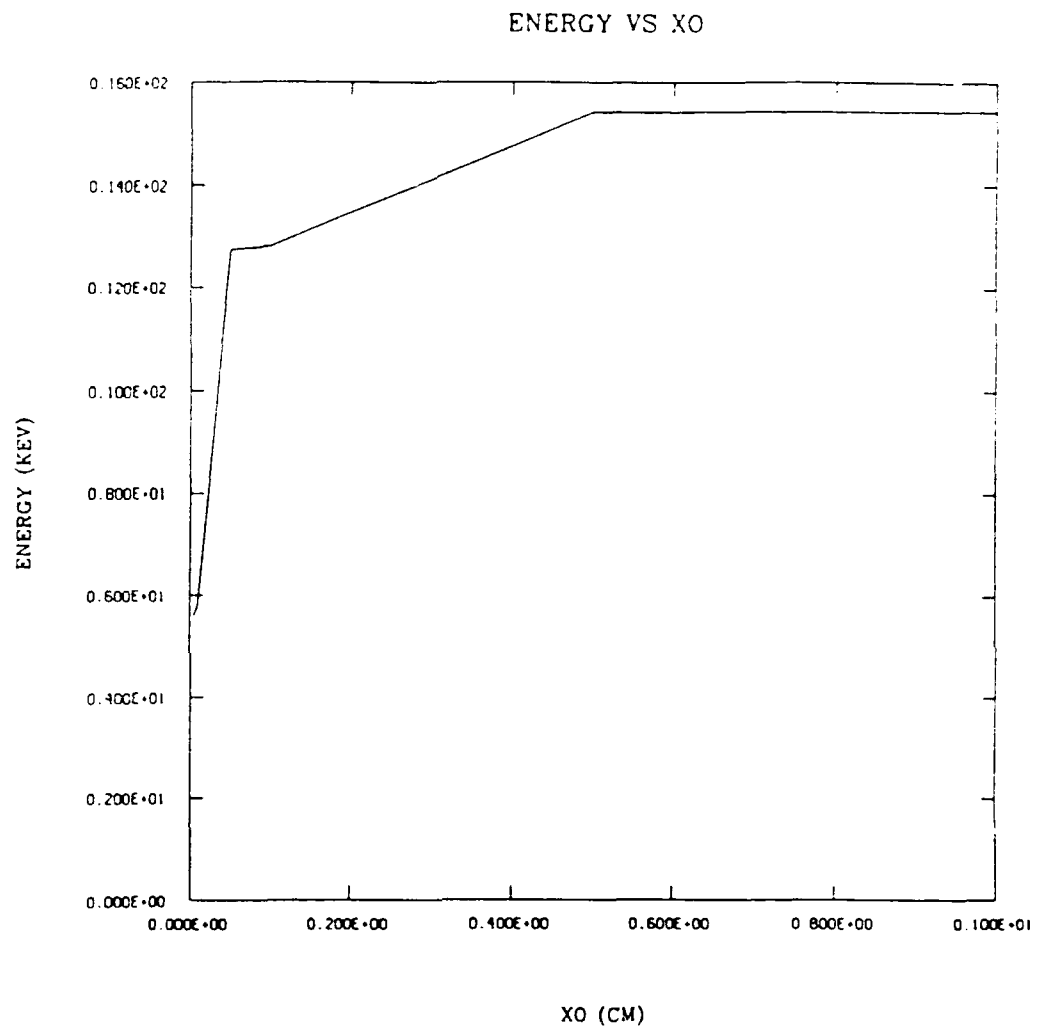


Energy as a Function of the
Density Profile Width

Figure 4

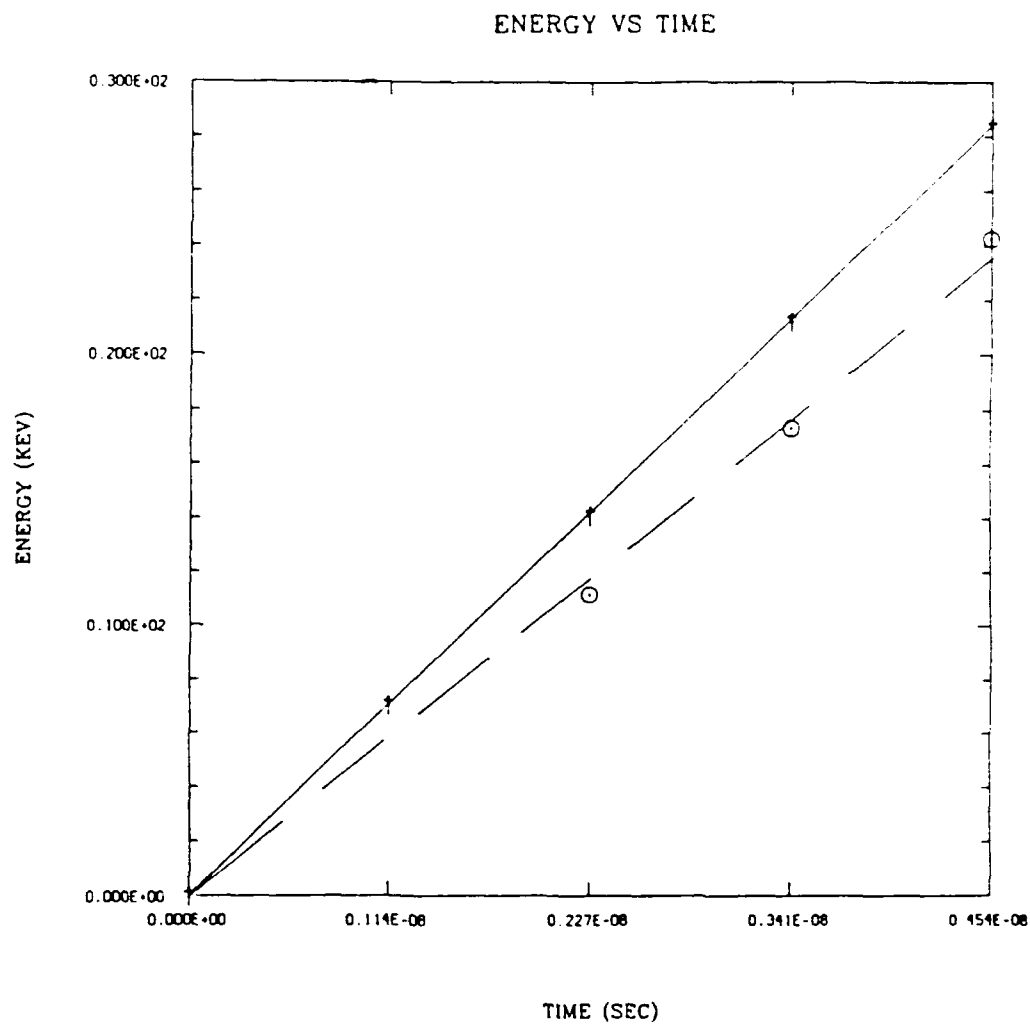


Neutral Energy at the Vacuum
Interface as a Function of Time

Figure 5

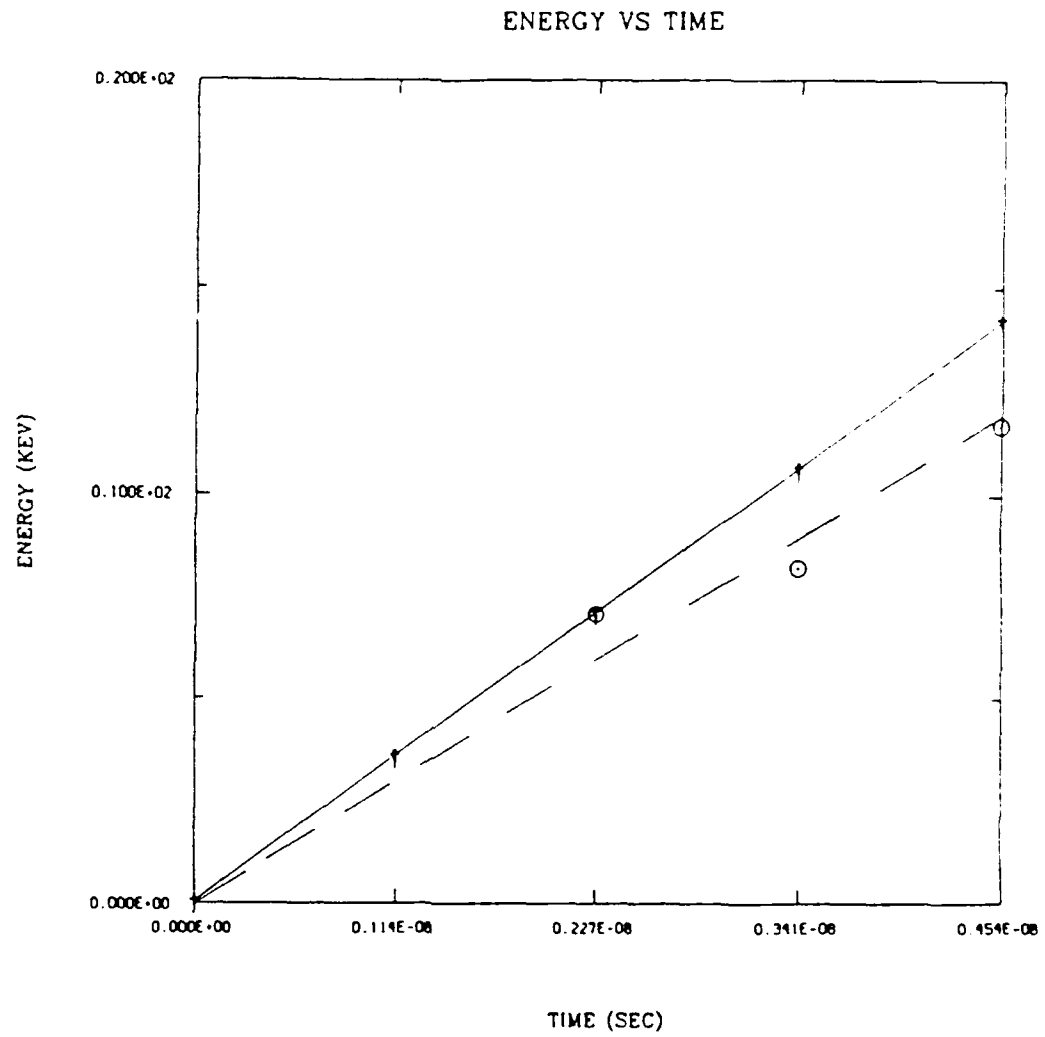

Neutral Energy at the Vacuum
Interface as a Function of Time

Figure 6

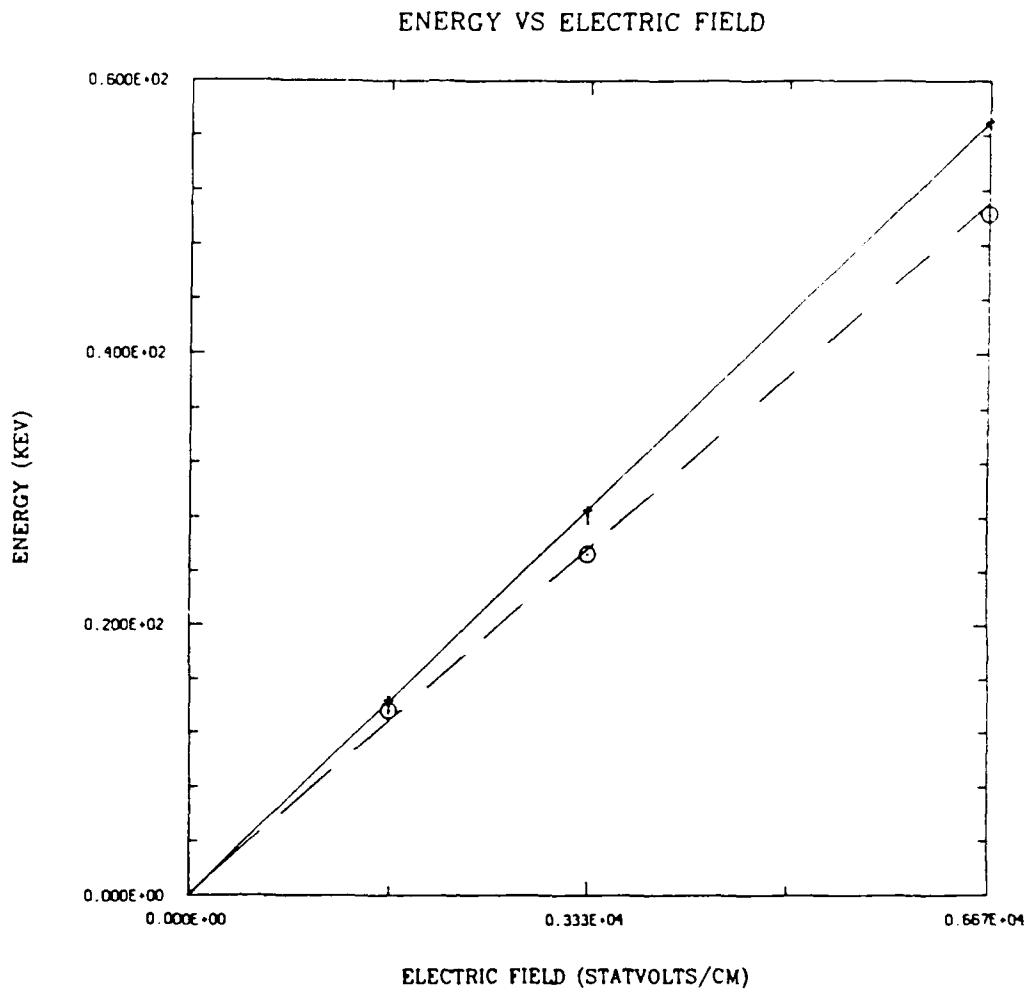

Neutral Energy at the Vacuum
Interface as a Function of the
Static Electric Field

Figure 7

DISTRIBUTION LIST

Assistant to the Secretary of Defense Atomic Energy Washington, D.C. 20301 Attn: Executive Assistant	1 copy
Director Defense Nuclear Agency Washington, D.C. 20305 Attn: DDST TITL RAEV STVI	1 copy 4 copies 1 copy 1 copy
Commander Field Command Defense Nuclear Agency Kirtland AFB, New Mexico 87115 Attn: FCPR	1 copy
Director Joint Strat TGT Planning Staff Offutt AFB Omaha, Nebraska 68113 Attn: JLKS	1 copy
Undersecretary of Defense for RSCH and ENGRG Department of Defense Washington, D.C. 20301 Attn: Strategic and Space Systems (OS)	1 copy
Deputy Chief of Staff for RSCH DEV and ACQ Department of the Army Washington, D.C. 20301 Attn: DAMA-CSS-N	1 copy
Commander Harry Diamond Laboratories Department of the Army 2800 Powder Mill Road Adelphi, Maryland 20783 Attn: DELHD-N-NP DELHD-TA-L (Tech. Lib.)	1 copy each
U.S. Army Missile Command Redstone Scientific Information Center Attn: DRSMI-RPRD(Documents) Redstone Arsenal, Alabama 35809	3 copies
Commander U.S. Army Nuclear and Chemical Agency 7500 Backlick Road Building 2073 Springfield, Virginia 22150 Attn: Library	1 copy

Commander Naval Intelligence Support Center 4301 Suitland Road, Bldg. 5 Washington, D.C. 20390 Attn: NISC-45	1 copy
Commander Naval Weapons Center China Lake, California 93555 Attn: Code 233 (Tech. Lib.)	1 copy
Officer in Charge White Oak Laboratory Naval Surface Weapons Center Silver Spring, Maryland 20910 Attn: Code R40 Code F31	1 copy each
Weapons Laboratory Kirtland AFB, New Mexico 87117-6008 Attn: Dr. William Baker SUL CA	1 copy each
Deputy Chief of Staff Research, Development and Accounting Department of the Air Force Washington, D.C. 20330 Attn: AFRDQSM	1 copy
Commander U.S. Army Test and Evaluation Command Aberdeen Proving Ground, Maryland 21005 Attn: DRSTE-EL	1 copy
Auburn University Department of Physics Attn: Dr. J. Perez Auburn, Al 36849	1 copy
BDM Corporation 7915 Jones Branch Drive McLean, Virginia 22101 Attn: Corporate Library	1 copy
Berkeley Research Associates Post Office Box 983 Berkeley, California 94701 Attn: Dr. Joseph Workman	1 copy

Berkeley Research Associates Post Office Box 852 5532 Hempstead Way Springfield, Virginia 22151 Attn: Dr. Joseph Orens	1 copy each
Boeing Company Post Office Box 3707 Seattle, Washington 98134 Attn: Aerospace Library	1 Copy
General Electric Company - Tempo Center for Advanced Studies 816 State Street Post Office Drawer QQ Santa Barbara, California 93102 Attn: DASIAC	1 Copy
Institute for Defense Analyses 1801 N. Beauregard Street Alexandria, Virginia 22311 Attn: Classified Library	1 copy
JAYCOR 1608 Spring Hill Road Vienna, Virginia 22180 Attn: R. Sullivan	1 copy
JAYCOR 11011 Forreyane Road Post Office Box 85154 San Diego, California 92138 Attn: E. Wenaas F. Felber	1 copy
KAMAN Sciences Corporation Post Office Box 7463 Colorado Springs, Colorado 80933 Attn: Library	1 copy each
Lawrence Livermore National Laboratory University of California Post Office Box 808 Livermore, California 94550 Attn: DOC CDN for 94550 DOC DCN for L-47 L. Wouters DOC CDN for Tech. Infor. Dept. Lib.	1 copy each

Lockheed Missiles and Space Company, Inc. Post Office Box 504 Sunnyvale, California 94086 Attn: S. Taimlty J.D. Weisner	1 copy each
Maxwell Laboratory, Inc. 9244 Balboa Avenue San Diego, California 92123 Attn: A. Kolb K. Ware	1 copy ea.
McDonnell Douglas Corporation 5301 Bolsa Avenue Huntington Beach, California 92647 Attn: S. Schneider	1 copy
Mission Research Corporation Post Office Drawer 719 Santa Barbara, California 93102 Attn: C. Longmire	1 copy each
Mission Research Corporation-San Diego 5434 Ruffin Road San Diego, California 92123 Attn: Victor J. Van Lint	1 copy
Northrop Corporation Northrop Research & Technology Center 1 Research Park Palos Verdes Peninsula, California 90274	1 copy
Physics International Company 2700 Merced Street San Leandro, California 94577 Attn: C. Deeney T. Nash	1 copy each
R and D Associates Post Office Box 9695 Marina Del Rey, California 90291 Attn: Library	1 copy each
Science Applications, Inc. 10260 Campus Point Drive Mail Stop 47 San Diego, California 92121 Attn: R. Beyster	1 copy

Science Research Laboratory
1150 Ballena Blvd., Suite 100
Alameda, California 94501
Attn: M. Krishnan

Spectra Technol, Inc.,
2755 Northup Way
Bellevue, Washington 98004
Attn: Alan Hoffman

1 copy

Spire Corporation
Post Office Box D
Bedford, Massachusetts 07130
Attn: R. Little

1 copy

Director
Strategic Defense Initiative Organization
Pentagon 20301-7100
Attn: T/IS Dr. Dwight Duston

1 copy

Texas Tech University
Post Office Box 5404
North College Station
Lubbock, Texas 79417
Attn: T. Simpson

1 copy

TRW Defense and Space Systems Group
One Space Park
Redondo Beach, California 90278
Attn: Technical Information Center

1 copy

Naval Research Laboratory
Radiation Hydrodynamics Branch
Washington, D.C. 20375
Code 4720 - 50 copies
4700 - 26 copies

Do NOT make labels for
Records----(01 cy)
Code 4828---(22 cys)

Director of Research
U. S. Naval Academy
Annapolis, MD 21402
(2 copies)

Naval Research Laboratory
Washington, DC 20375-5000
Code 4830
Timothy Calderwood

Naval Research Laboratory
Washington, DC 20375-5000
Code 1220